



## Digitalmessuhren

- Alugehäuse
- LCD Grossanzeige drehbar 270°
- Einspannschaft 8 mm, h 6
- Schnittstelle Opto RS232C
- Schutzart IP51

### Funktionen:

Nulleinstellung  
 Wechseln mm / inch, Hold  
 Datenübertragung  
 Ref.I / Ref.II  
 Vorwahlwert- Abruf  
 Umkehrung der Messrichtung  
 Datenabfrage durch ASCII Code  
 Wahl und Anzeige von Toleranzgrenzen  
 Half duplex Übertragung

\* Min / Max / Delta Speicher

> mm <	 mm	 inch	No.
12,5	0,001	0,005	280-60
25,0	0,001	0,005	280-61
50,0	0,001	0,012	280-62
100,0	0,001	0,012	280-63
12,5	0,01	0,01	280-64
25,0	0,01	0,01	280-65
50,0	0,01	0,02	280-66
100,0	0,01	0,02	280-67
*12,5	0,01/ 0,001	0,005	280-68
*25,0	0,01/ 0,001	0,005	280-69

Sonderzubehör Accessory Accessoires	No.
Kabel für Opto RS232C Schnittstelle (2m) Cable for Opto RS232C interface (2m) Câble pour liaison électronique Opto RS232C	100-43
Ersatz-Batterie Typ CR2032 Spare battery type CR2032 Pile de rechange de type CR2032	Bat-01
Anlüfthebel oben für 12,5 / 25 mm Lifting lever on top for 12,5 / 25 mm Levier de reievage su périeure pour les courges 12,5 / 25 mm	280-72
Anlüfthebel Lifting lever Levier de reievage	280-73

## Digital indicators


- aluminium housing
- large LCD display turnable 270°
- stem 8 mm, h 6
- interface Opto RS232C
- protective system IP51

### Features:

Zero setting  
 mm / inch, Hold  
 Data transmission  
 Ref.I / Ref.II  
 Preset  
 Selection of measuring direction  
 Data request by any ASCII Code  
 Min / Max / delta memory  
 Setting and display of tolerance-limits  
 Half duplex transmission



280-60

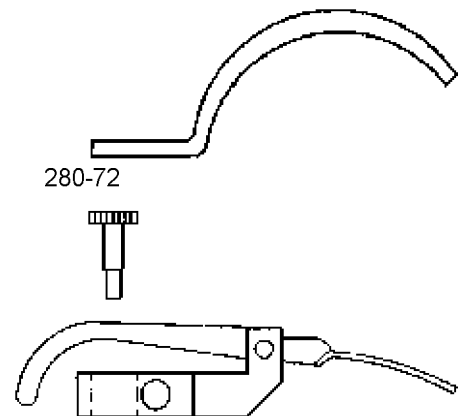

280-72

280-73